


## WR Series LED Wraparound Light

### Features



- 120-277V and 200-240V Input Voltage.
- 2ft & 4ft Size, 20w, 32w, 40w and 48w
- 0-10V and Traic Dimming, Flicker free
- Luminous efficacy: 130lm/w
- PF >0.90; Driver efficiency 87%; THD <20%
- Installation: Ceiling Mount & V-Hook Chain
- CCT: 3000K 4000K 5000K or Selectable CCT
- ETL CETL, FCC certification
- Optional: Microwave sensor & Emergency
- 5 years warranty

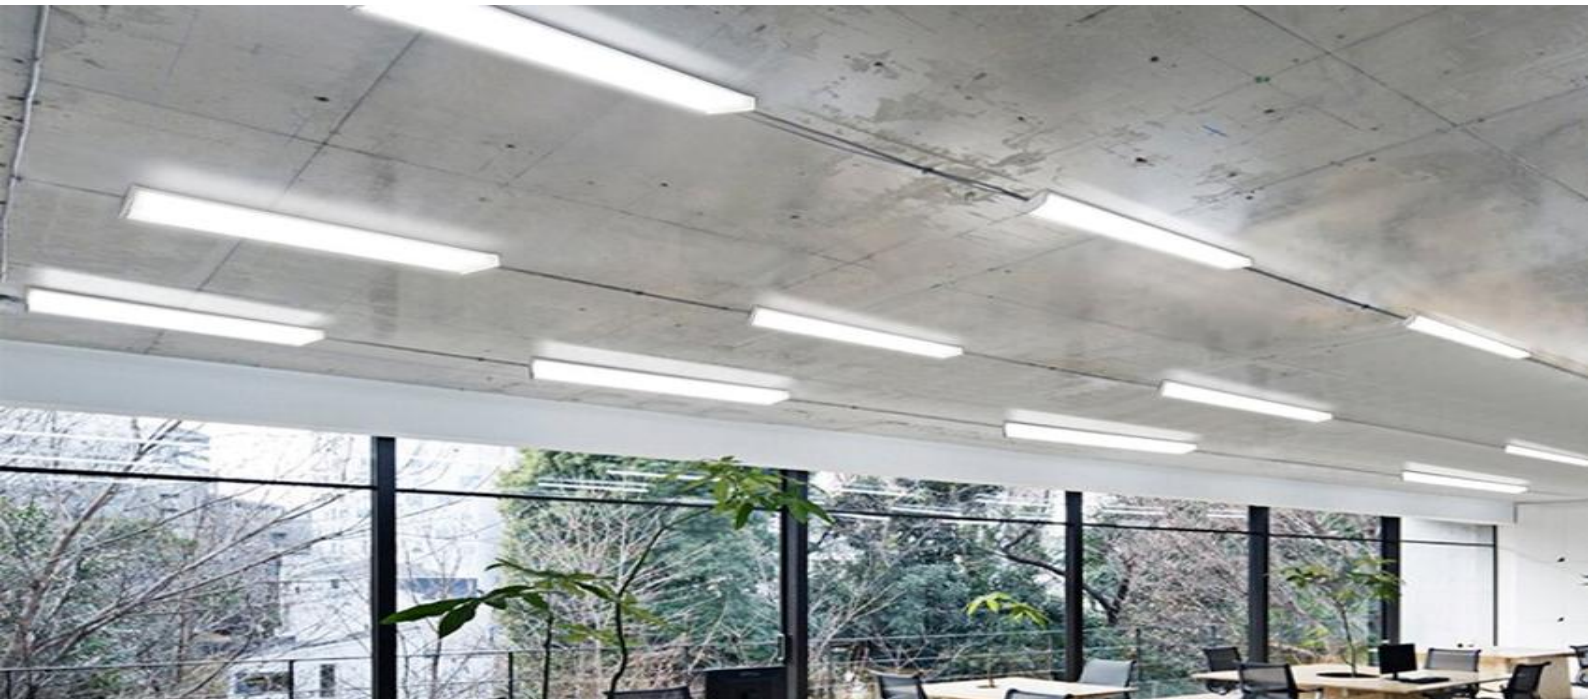

Applications:

Ideal for indoor use in stairwells, hallways, foyers, utility areas, corridors and many more.

## Image Show




## Product Range



Name	Series	Watts	Size	Voltage	CCT	Driver	Motion Sensor	Emergency	cord types
RDS	WR	XX	X	AAA	CCC	C	X	Y	S
		20W	2= 2ft	277=120-277V	40K = 4,000 K	A=AGT	S=with Sensor	E=with Emergency	S=Smart
		32W	4= 4ft	347=120-347V	50K = 5,000 K	B=BECKY	Black=Without Sensor	Black=without Emergency	Blank=without Supply Cord
		40W		240=200-240V	3CCT=3000K/4000K/5000K				
		30-45W		120=120V					

Model	Size	Watts	Dimming	CCT	Lumens	Dimensions (LxWxH)
RDS-WR-20W-2FTAAA-CCC	2 ft	20 W	YES	4000K/5000K	2600 lm	24x5.51x2.77"
RDS-WR-32W-4FTAAA-CCC	4 ft	32 W	YES	4000K/5000K	4,160 lm	48x5.51x2.77"
RDS-WR-40W-4FTAAA-CCC	4 ft	40 W	YES	4000K/5000K	5,200 lm	48x5.51x2.77"
RDS-WR-2440W-4FTAAA-CCC	4 ft	24-32-40 W	YES	4000K/5000K	3120-5200lm	48x5.51x2.77"
RDS-WR-3045W-4FTAAA-CCC	4 ft	30-35-40-45 W	YES	3000K-4000K-5000K	3900-5850lm	48x5.51x2.77"
RDS-WR-48W-4FTAAA-CCC	4 ft	48 W	YES	4000K/5000K	29,700 lm	48x5.51x2.77"

## Product Dimension

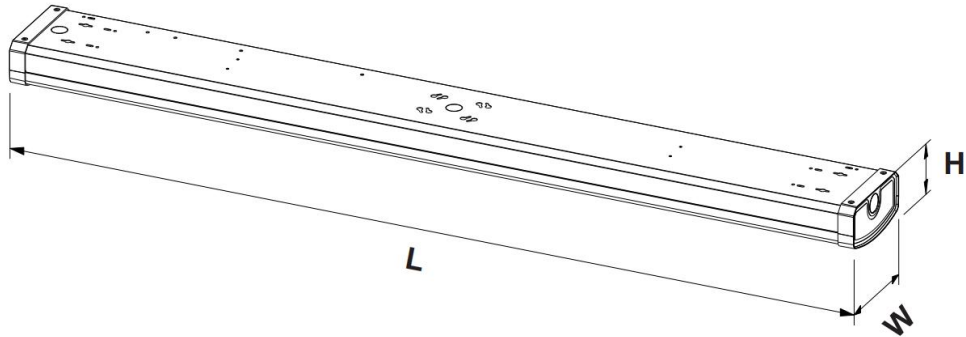

Part No.	L(inch)	W(inch)	H1(inch)
RDS-WR-20W-2FTAAA-CCC	24"	5.51"	2.77"
RDS-WR-32W-4FTAAA-CCC	48"	5.51"	2.77"
RDS-WR-40W-4FTAAA-CCC	48"	5.51"	2.77"
RDS-WR-2440W-4FTAAA-CCC	48"	5.51"	2.77"
RDS-WR-3045W-4FTAAA-CCC	48"	5.51"	2.77"
RDS-WR-48W-4FTAAA-CCC	48"	5.51"	2.77"

## Product Packing



Part No.	Power	Qty/Carton(pcs)	Carton Size	Net weight	Gross Weight
RDS-WR-20W-2FTAAA-CCC	20W	6	66*31.5*25CM	9.6Kg	12.8Kg
RDS-WR-32W-4FTAAA-CCC	32W	6	126*31.5*25CM	19.5Kg	23.8Kg
RDS-WR-40W-4FTAAA-CCC	40W	6	126*31.5*25CM	19.5Kg	23.8Kg
RDS-WR-2440W-4FTAAA-CCC	24-32-40W	6	126*31.5*25CM	19.5Kg	23.8Kg
RDS-WR-3045W-4FTAAA-CCC	30-35-40-45W	6	126*31.5*25CM	19.5Kg	23.8Kg
RDS-WR-48W-4FTAAA-CCC	48W	6	126*31.5*25CM	19.5Kg	23.8Kg

# Installation Options

